

Feature & Technical Data




控制面板
 检验错误
 缝制速度 (1000~2000spm)
 球状选择把手
 (先开孔后本缝/先本缝后开叉/只切不缝/只缝不切)



简洁的控制箱



脚踏板
 抬压脚 (右踏板)
 开始 (左踏板)

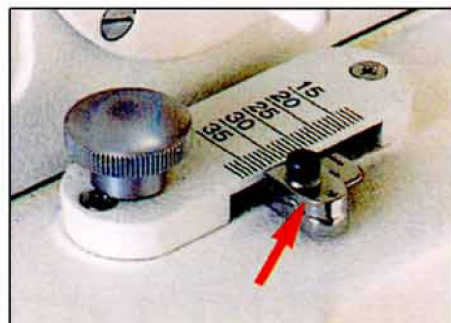


缝制长度的调整装置

The selection of all functions can be adjusted simply by turning knob/dial.
 The mode of changing (knife selection, button-hole type, stitch length, stitch width) is all illustrated on the control panel and on the machine body.



羊毛纤维

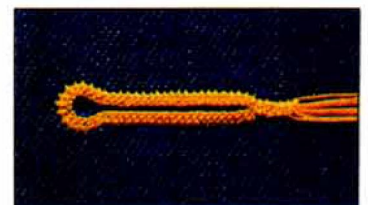

牛仔/厚料

Technical Data

| Specification/Model | D-2002-1 | D-2002-2 |
|-------------------------------|------------------------------------|------------|
| Type of cloth clamp(standard) | Flat type | Wedge type |
| 针步类型 | Single needle Double-chain stitch | |
| 车缝速度 | 1,000spm. ~ 2,000spm.(adjustable) | |
| 钮孔类型 | Eyelet and Straight buttonhole | |
| 针线切割刀 | Built-in | |
| 锁眼长度 | 13 mm ~ 40 mm | |
| 尾结长度 | 4 mm ~ 9 mm | |
| 针距 | 0.5 mm~1.5 mm | |
| 针迹幅度 | 2.2 mm~3.2 mm | |
| 车切的选择 | C/B, C/A, Sewing only and Cut only | |
| 尾结和刀 | Motor drive (built-in) | |
| 无极变速 | Motor drive (built-in) | |
| 开孔/不开孔 | Motor drive (built-in) | |
| 机针的种类 | Schmetz system 558 #90 ~ #120 | |
| 功率 | AC200~230V, 1-phase, 50/60Hz | |
| 重量 | 45kg | |
| 机器尺寸 | W300×L500×H460 | |

JUKI CO.,LTD.

No.2 Funato Bldg.
 11-11, 1-Chome, Kudan-Kita
 Chiyoda-ku, Tokyo 102-0073, Japan
 Tel.81-3-3265-2851 Fax:81-3-3265-2281


立欣(宁波)针车有限公司
 代理店: LUNA(NINGBO)SEWING MACHINE CO.,LTD.
 中国浙江省宁波市鄞州区姜山镇星火科技园
 013 Jiang Shan Town Xing Huo Scientific &
 Technical Area Yin Zhou District Ningbo City, China
 TEL:86-574-8845-3458 8845-3468 8845-7489
 FAX:86-574-8845-3478
 E-MAIL:lunasewbo@lunasew.com
 HTTP:www.lunapress.com.cn

ELECTRONICALLY CONTROLLED INDUSTRIAL EYELET BUTTONHOLER

DIANA

D-2002 SERIES

电子圆头锁眼机 系列

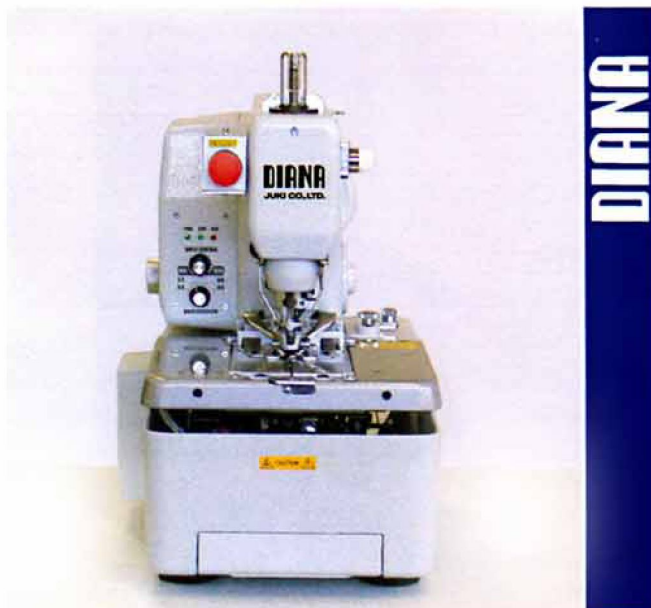

DIANA

Model

D-2002-1

(适用于男女时装)

D-2002-2

(适用于牛仔服装)

OPTIONAL: 驱动电机、桌台板、脚架等(另购置)



D-2002系列工业用电子圆头锁眼缝纫机

技术进步使圆头锁眼缝纫机焕然一新。

新型的电子圆头锁眼缝纫机与原来的离合器型相比，操作、保养更加简单，运转噪音大幅度降低。使用该缝纫机不需要特别技能。

新型电子圆头锁眼缝纫机采用一体化设计，可以放置在任何机架上使用。使用时不需要压缩空气。

JUKI CO., LTD. Tokyo, Japan