

LUNAPRESS®

LN-600SC

**TOP FUSING MACHINE
FOR HIGH QUALITY SHIRTS, SUITS & BLOUSES**



***World's Most Advanced & Innovative
Pressing & Fusing Machines
for the Clothing Industry***


總公司Head office :
立欣針車實業有限公司
LUNA INDUSTRIAL CO., LTD.
臺灣22061新北市板橋區四川路2段16巷9號5樓
5F., No.9, Ln. 16, Sec. 2, Sichuan Rd., Banqiao Dist.,
New Taipei City 22061, Taiwan
(LEADER INDUSTRIAL AREA)
TEL : 886-2-8966-5577 FAX : 886-2-8966-5443
E-MAIL : info@lunasew.com
luna0510@ms13.hinet.net
HTTP : //www.lunasew.com

服務處Factory :
立欣(寧波)針車有限公司
LUNA (NINGBO) SEWING MACHINE CO., LTD.
中國浙江省寧波市鄞州區姜山鎮星火科技園環鎮北路13號
No. 13 HuanZhen (N)Road, JiangShan Town
XingHuo Scientific & Technical Area
Yin Zhou District Ningbo City, China
TEL : 86-574-8845-3458 8845-3468
FAX : 86-574-8845-3478
E-MAIL : lunaningbo@lunasew.com



LN-600SC Design

機體內部構造

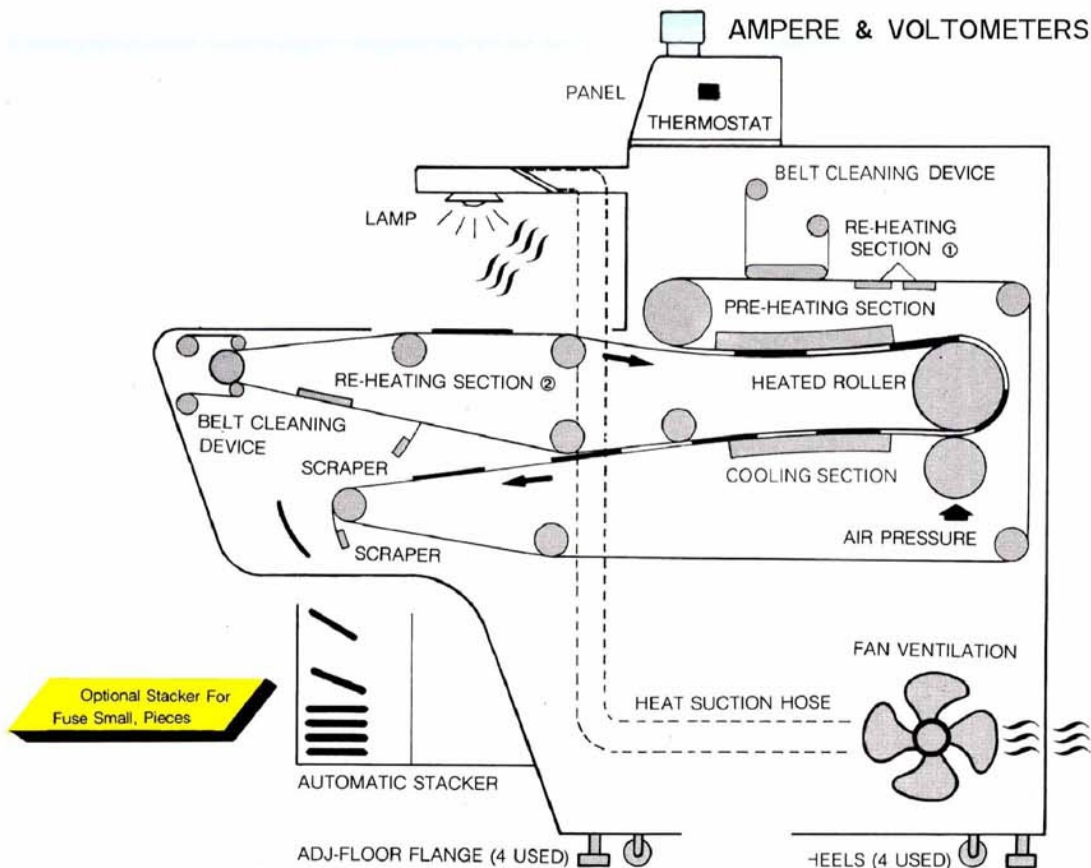

• OPTIONAL
mod. sc-60
Water Cooling Device
水冷式冷卻裝置



Features	特點
<ul style="list-style-type: none"> Space efficient-small footprint Economic energy consumption: 9KW Pre-heating station gives higher production; Sandwich-fusing is possible. Cooling device, the goods are held under light pressure during the cooling process. Continous system — therefore unlimited working length. The fused parts come back to the operator and are stacked. Incorporated belt-cleaning device. Easy to operate, little maintenance. Automatic belt adjustment. Short heating-up period: 12 min. to 180°C. Easy to read instrument panel. The change of conveyor belts can done in a short time. (50 min.) 	<ul style="list-style-type: none"> 只要極小空間，可背簾使用。 省電9KW 由於有預熱系統，可提高產量，並且更適合內外雙層黏襯。 因有冷卻系統，成品不易變形。 屬連續式壓襯，裁片長度不受限制。 由於前面送料及收料故可一人操作，並可同時做品檢工作。 隱藏式皮帶除垢清除裝置。 操作容易，維護簡單。 耐熱皮帶(TEFLON)俱有自動平衡裝置。 加熱時間短，12分鐘即可達180°C。 面板操作容易。 更換新皮帶很容易，一般使用者只需約50分鐘。

Specifications	規格
MODEL 型號	CP-600SC
供電	220V or 380V 50/60 Hz Single or 3 Phase (415V AVAILABLE)
Power Consumption 電力消耗	9KW
Air Connection 空壓接頭	5/16" (8mm)
Water Connection 進水接頭	3/8" (9.5mm)
Drainage Connection 出水接頭	3/8" (9.5mm)
Air Consumption 空壓消耗	6atm.
Fusing Width 使用寬度	600mm (24")
Temperature Range 溫度調整	0°-200°C
Time Range 定時	5-28sec.
Max. Pressure 最大壓力	5.0kgs/cm ²
Net Weight 機體淨重	480 Kgs
Gross Weight 機體毛重	680 Kgs
Dimensions 機體尺寸	120(W) × 145(L) × 150(H)cm
Packing Volume 裝箱尺寸	111(W) × 151(L) × 170(H)cm